



iPanel light

-with emergency and dimming



Non-glare & high uniformity

Largest visible area

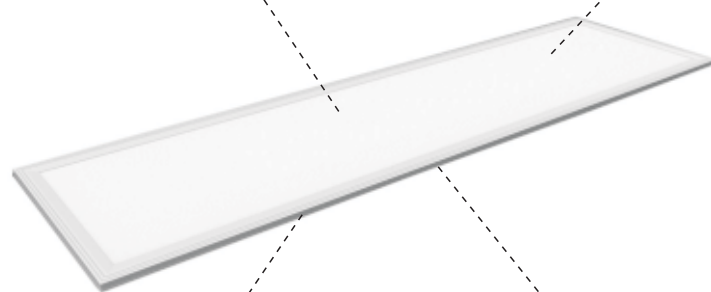

Ultra Thin 9mm

Edge-lit panel technology

Product Characteristics

Dimension	300*1200*9MM 295*1195*9mm ,315*1215*9mm are optional
Material	PMMA+Aluminum
Frame Color	Matt White/ Aluminum
Power	60W
Input Voltage	AC100-265V, 50/60Hz
LED	SMD(2835)
Color Temperature	Cool, Natural and Warm White
Luminous Flux	5200lm(cool)
Color Rendering Index	82Ra
Sealing	Ip43
Power Factor	>0.95
Lifetime	30,000hrs
Guarantee	3 Years
Certifications	CE , RoHS , TUV , UL , CUL

Emergency Operation

Type	Non-maintained
Duration	3hrs backup
Output	200lm
Charge Indicator	Red LED

Dimming Options

Type	Dali/1-10V/SCR/PWM
Function	On/off, dimming

Can control single or multiple panels

Wireless controller is available upon request.